



RGX-SGT


➔ Over Glove for Insulating glove **TOUCH-e**

STANDARD

EN388+A1:2018
EN407:2004
EN ISO21420
IEC61482-1-2



DuPont™
Kevlar.

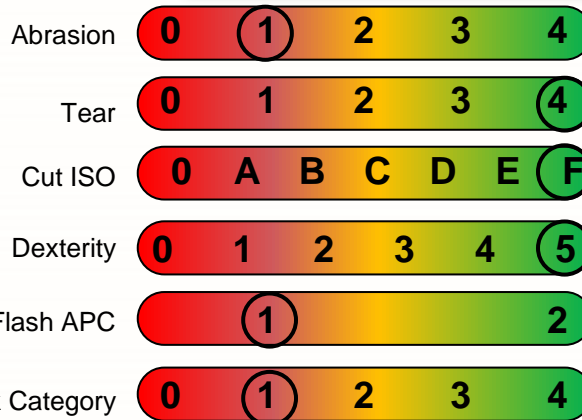

USE

Designed to fit an electrician glove (Touch-e) and ensure a perfect dexterity

ADVANTAGES

- +++ SAFETY / PRODUCTIVITY : Exceptional resistance to cutting, Kevlar® technology, good dexterity
- +++ Sustainability : Manufacturing in France, traceability of raw materials in accordance with Reach

CHARACTERISTICS

- Gauge 10 seamless Knitting glove
- Kevlar® fiber thread, mineral and cotton composite
 - Reinforcement in leather goat flower on thumb-index-middle finger and palm
 - Black/yellow color
 - Packaging: 10 pairs

Document not contractually binding, errors and omissions excepted



Rue Robert Maréchal - 36100 Issoudun - France
+33 (0)2 54 03 00 94 - www.regeltex.com





RGX-SGT

→ Over Glove for Insulating glove **TOUCH-e**

SIZE FITTING RECOMMANDATION

Touch-e		
JFO	RGX-SGT	Ref
8	B	RGX-SGT/B
9	B	RGX-SGT/B
10	C	RGX-SGT/C

COMPLEMENTARY CHARACTERISTICS

Ref	Weight (UC)
RGX-SGT/taille (B; C)	0,85kg

- Performances on palm reinforced by leather – Information available on user information sheet only.

- EN388 = 2X43F

- Arc Flash – Open Arc (ASTM2675/F2675M:21)

- ASTM2675/F2675M:21

= 5.8 Cal/cm²

Informative note:

-ASTM2675/F2675M:21 (JFO+RGX-SGT)

= 33.4 Cal/cm²

Washing instructions:



DESCRIPTION OF SAMPLES



Reference by AITEX: 2023EP0023-S01
Reference by customer:
 JFO36-0/09 + RGX-SGT
Information supplied by the customer
 Layer 1
 Rubber glove orange color
 Style JFO36-0/09
 Layer 2
 Style Dextech LP
 Color Black/Yellow