


Product name	12F Blown fiber EPSU MM OM4 Blue HDPE 1,6mm 2km/pan, S12
Product code	9103079
Product type	EPSU 12XOM4 BU
GTIN	7070701321301
ETIM-Class	EC000034

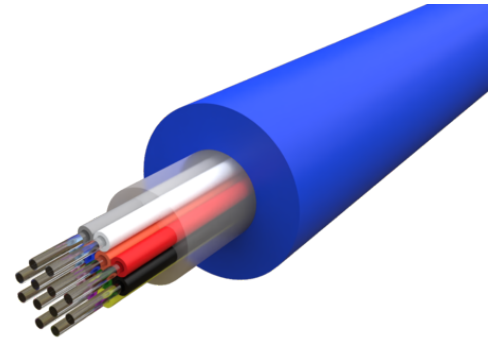

PRODUCT SPECIFICATIONS

12F OM4 EPSU air blown optical fibre is typically used in micro duct installation applications. ABF can utilize in existing and new duct systems more effectively by accommodating more fibres in given subduct network. The fiber units is suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction is optimized for best installation performance.

The expected service life in normal use exceeds 30 years.

Measurements

Length	1 000 mm
Height	1,6 mm
Width	1,6 mm
Weight	1,9 g

Physical Characteristics

Fibre Count	12
Cable Construction	Acrylat
Fibre Type	OM4
Fibre Colour Sequence	S12 & EIA/TIA-598A
Tube Size	
Outer Sheath Material	HDPE (High Density Polyethylene)

Colour of Cable Sheath	Blue
Nominal Sheath Thickness	
Cable Diameter	1,6 mm
Cable Diameter Tolerance	+/- 0.2 mm
Nominal Cable Weight	2 kg/km

Mechanical & Environmental Characteristics

Halogen Free	Yes
Metal free	Yes
Tensile Strength (N) IEC-60794-1-21-E1	19 N
Crush Resistance - IEC- 60794-1-21-E3	100 N/10cm
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	60 mm
Temperature Performance Installation IEC-60794-1-22-F1	-15°C till +50°C*
Temperature Performance Operation IEC-60794-1-22-F1	-40°C till +60°C
Temperature Performance Storage IEC-60794-1-22-F1	-40°C till +60°C