


Product name	Microduct ID 5/3.5mm WHITE HFFR D500m
Product code	2821908
GTIN	7070701365596
ETIM-Class	EC001474

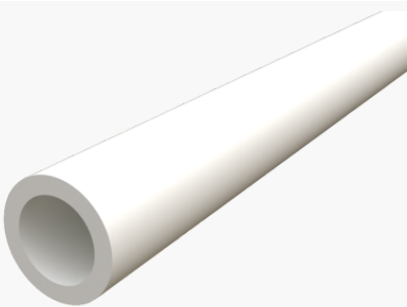

PRODUCT SPECIFICATIONS

HFFR microducts are designed for long term protection of fiber optical cables and are especially suitable for installation of micro cables. Indoor microducts are used for indoor installation applications with a sheath made of halogen-free, flame retardant material. Parameters such as flexibility and higher safety levels for fire and dangerous substances makes it optimized for safe and effective indoor installations.

Compliant to Telcordia GR 3155-CORE

Measurements

Length	1 000 mm
Height	5 mm
Width	5 mm
Weight	18 g

Technical Specifications - Single Ducts

Duct Type	5/3.5
Duct Colour	White
Outer Diameter	5 mm
Outer Diameter Tolerance	+/- 0.1 mm
Inner Diameter	3,5 mm
Inner Diameter Tolerance	+/- 0.1 mm
Min Bending Radius	50 mm

Max Install Tensile Force	100 N
Inner clearance test (of ID)	85 %
Weight	18 kg/km
Outer/inner surface quality (PN 64-004-99)	Without Deformation
Longitudinal reversion (EN ISO 2505)	max 3%
Density (EN ISO 1183)	1.55 +/- 0.1
Blowing pressure	16 Bar

Mechanical Characteristics

Temperature ranges for installation	+5°C - +45°C
Temperature ranges for Operation	-40°C - +70°C
Temperature ranges for transport and storage	-20°C - +55°C
Pressure Withstand (EN 1167-1,2)	resistance to internal pressure (23°C, 16 bar, 2 h)
Tensile performance (IEC 60794-1-21, Method E1)	compliant
Kinking (IEC 60794-1-21, Method E10)	compliant
Crush (IEC 60794-1-21, Method E3A)	compliant
Impact (IEC 60794-1-21, Method E4)	compliant
Bending (IEC 60794-1-21, Method E11B)	compliant
Repeated bending (IEC 60794-1-21, Method E6)	Bending diam 40x OD, 25 cycles without any damage
Coefficient of Friction (IEC 62470)	< 0,1
Torsion IEC-60794-1-21-E7	Tension around a curve of 1040mm with CoF <0.1
ESCR Test (ASTM D1693)	Condition B>500h with min 5 OK out of 10

Flame Retardant Test Compliance

Fire Classification EN 13501-1	B-s1, d0
Flammability Compliance	EN 60332-3-10, EN 60332-3-23 category B
Smoke Density	IEC 61034-2
Halogen Content	IEC 60754-1, 0%
UL 94 (EN 60695-11-10)	V-0
Limiting oxygen index (ISO 4589-2)	Min. 32%
Droplets	No material dripping at burning