


<b>Product name</b>	Cablejoint 4x50 - 3/4x16-50mm <sup>2</sup> 1kV with mechanical connector
<b>Product code</b>	1167446
<b>Product type</b>	MPC-M-4L-2
<b>GTIN</b>	7070701337128
<b>ETIM-Class</b>	EC001169

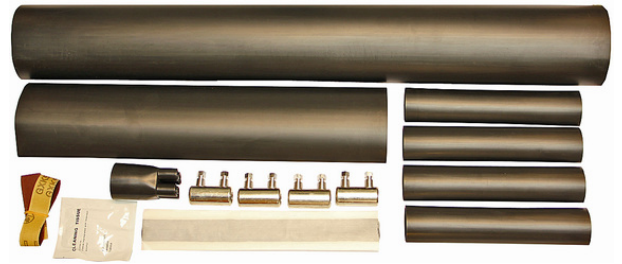

## Measurements

<b>Length</b>	770 mm
<b>Height</b>	80 mm
<b>Width</b>	170 mm
<b>Weight</b>	969 g

## Technical Specifications - Joint 1kV

<b>Voltage</b>	1 kV
<b>Number of Conductors</b>	4
<b>Screen</b>	No
<b>Incl Contact Material</b>	Mechanical
<b>Incl. Liners</b>	Yes
<b>Insulation Type</b>	Heat Shrink Tube
<b>Halogen Free</b>	Yes

## Cable specifications for contact material

<b>Aluminum Stranded</b>	16-95 mm <sup>2</sup>
<b>Aluminum Sector Stranded</b>	35-95 mm <sup>2</sup>
<b>Aluminum Solid</b>	16-95 mm <sup>2</sup>
<b>Aluminum Sector Solid</b>	16-95 mm <sup>2</sup>
<b>Copper Stranded</b>	16-95 mm <sup>2</sup>

Copper Sector Stranded	35-95 mm <sup>2</sup>
Copper Solid	16-95 mm <sup>2</sup>
Copper Class 5 multistranded	16-50 mm <sup>2</sup>

## Application

Plastic Insulated Cables	Yes
Paper Insulated Cables	No
Installation Type	Straight
Type	Heat Shrink