

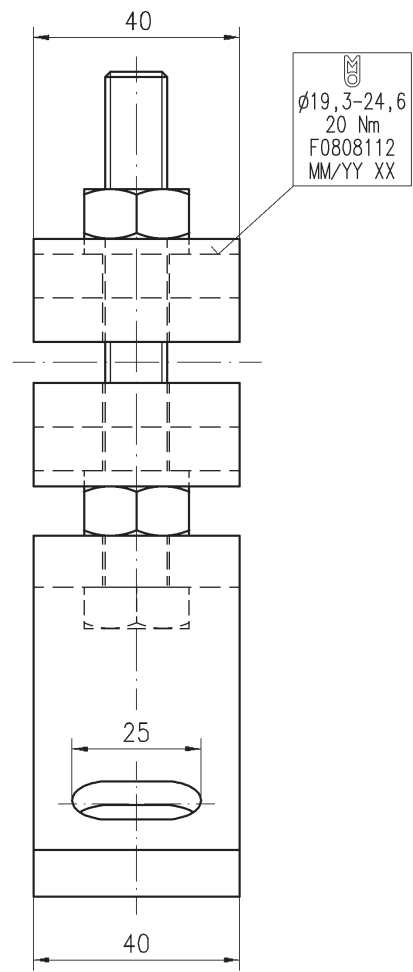
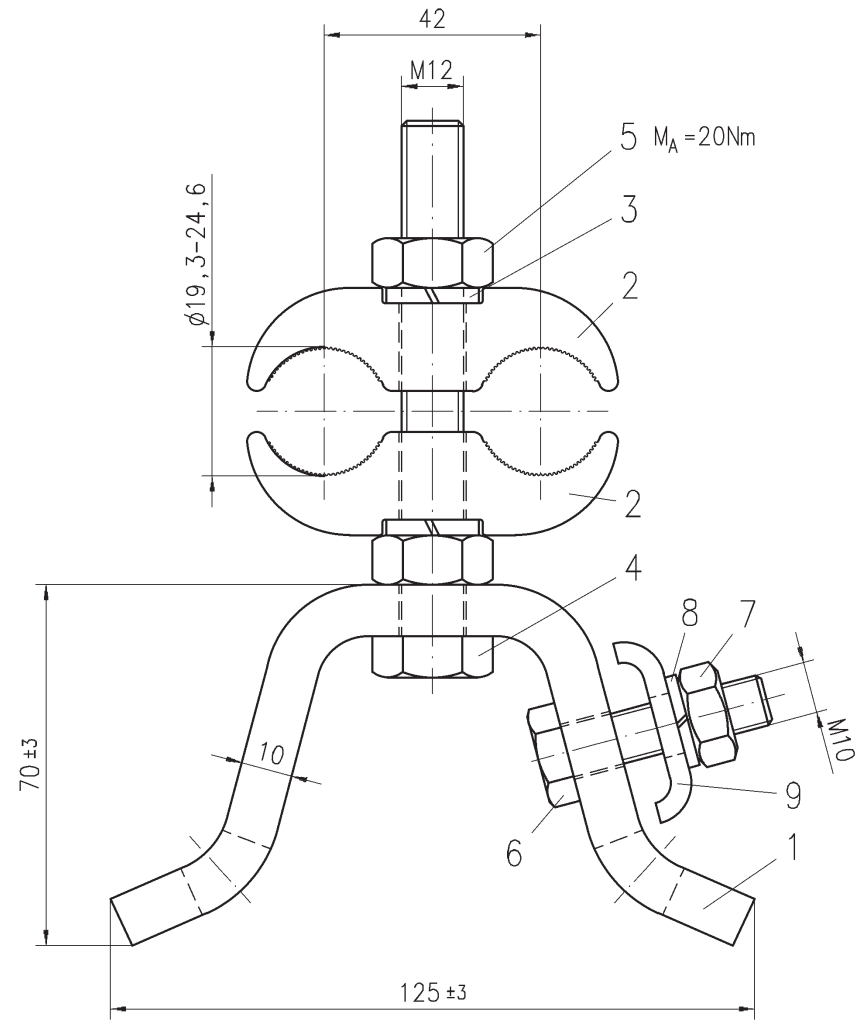



This page and its indications is intellectual property of Mosdorfer Company and it isn't allowed to forward those information to a third party without the written assent of Mosdorfer company.

Number	Modification	Date	Name

Letter	Revision	Date	Name

DETAIL: Pos.9



Item	Qty	Description	Standard	Drg. no.	Art. no.	Material	Surface	Mass [kg]
9	1	Clamp body 40x40x4				EN-AW 6082 H111		
8	1	Spring washer 10	DIN 7980		1064.03/1	Steel	mech. galv.	
7	1	Hexagon nut M10	DIN 934		1052.03/6	8	hot dip galv.	
6	1	Hexagon screw M10x40	DIN 933		1009.25/1	8.8	hot dip galv.	
5	2	Hexagon nut M12	DIN 934		1052.04/2	8	hot dip galv.	
4	1	Hexagon screw M12x100	DIN 933		1009.51/1	8.8	hot dip galv.	
3	2	Spring washer 12	DIN 7980		1064.14	Steel	mech. galv.	
2	2	Clamping case half		D0605002	MP 215.079	EN-AW 6082 T6		
1	1	Strap 40x10		D0805015	ZB 4680.0035	EN-AW 6082 T6		

2011	Date	Name		Replace for	Sim. to drg.-no.
Drawn	13.09.	Auer		Replaced by	F0808083
Checked	16.09.	Grimm		Art. No.	4680.0036
			MOSDORFER AUSTRIA	Drg. No.	F0808112
Scale 1:1				Title Fastening clamp for cond. Ø19,3-24,6 mm	
			No. of pages		Page

A3

Tolerance acc. to: ISO 2768-VL Short circuit current: --- kA 1s Breaking load: --- kN Mass: approx. 0,6 kg