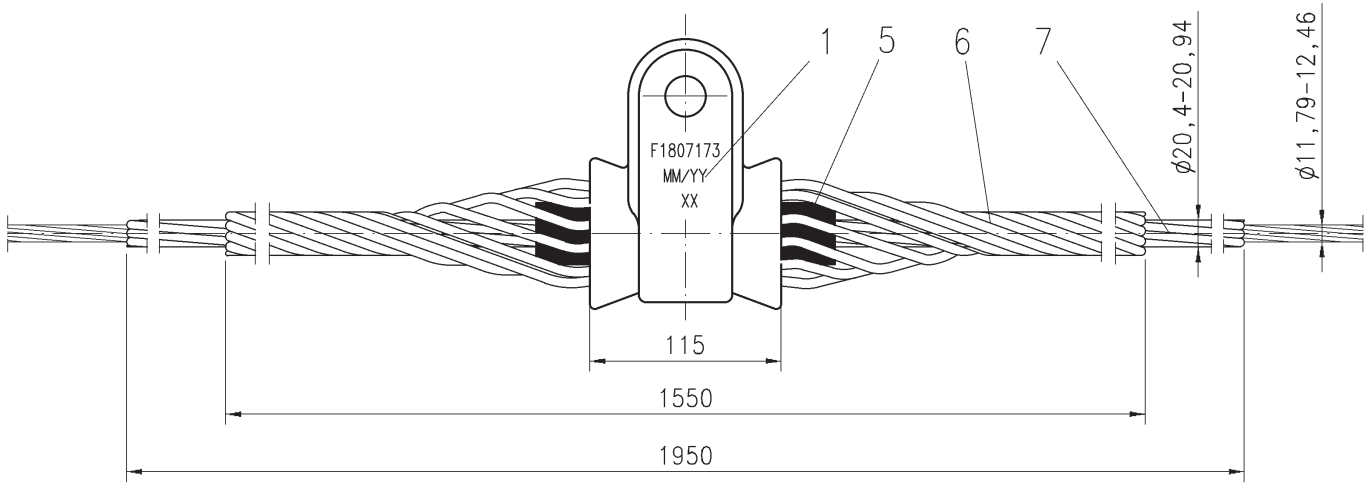

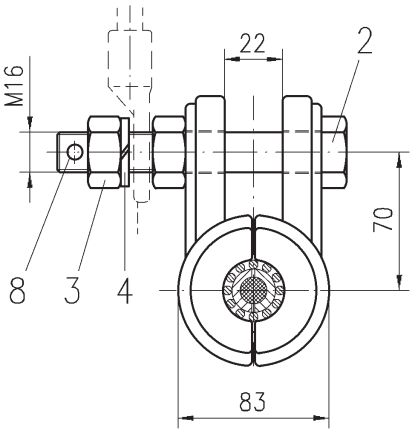

special design

Note: slipping load 25% of conductor UTS

Itm	Qty	Description	Standard	Drg. no.	Art. no.	Material	Surface	Mass [kg]
8	1	Cotter pin						
7	1	Line guards ø11,79-12,46;10x4,24/1950		F1003011	4772.312/4	Al-alloy		
6	1	Armor Grip ø20,22-20,95;11x6,35/1550		F1003003	4785.24	Al-alloy		
5	1	Insert ø20,22-20,95mm		D1807005/3	4786.24	Neoprene		
4	1	Spring washer B16	DIN 127			Steel	mech. galv.	
3	2	Hexagon nut M16	DIN 934			8	hot dip galv.	
2	1	Hexagon head bolt M16x115				8.8	hot dip galv.	
1	1	Armor grip susp. clamp		F1807026	4360.65/A	Al-alloy		

2001	Date	Name	MOSDORFER KNILL GRUPPE
Drawn	10.07	Grimm	
Checked	10.07	Bernauer	

Replace for — Sim. to drg.-no.
Replaced by — F1807163
Art. No. 4362.03/3A

Scale 1:2

Title: Armor grip susp. clamp
OPGW ø11,79-12,46 mm

Drg. No. F1807173

Rev. b | Mod. | A3

No. of pages | Page

Tolerance acc. to: ISO 2768 -vL | Short circuit current: 25 kA 1s | Breaking load: 100 kN | Mass: approx. 4,6 kg

Letter	Revision	Date	Name
b	Item 6/7 1550/1950 (1170/1830)	01.10.2019	Flicker
a	Pos. 7 4772.312/2 (.312/1)	17.12.2002	Grimm

Number	Modification	Date	Name

This page and its indications is intellectual property of Mosdorfer Company and it isn't allowed to forward those information to a third party without the written assent of Mosdorfer company.